

SPEAKMAN® SEF-1000-CA
 Eyesaver® Retrofit Faucet with Integrated Eyewash
 SPECIFICATION



EYEWASH FEATURES:

- Pull handle activator
- Aerated yellow plastic spray outlets with flip-top dust caps
- 2.87 gpm (8.3L/min) @30 psi performance

FAUCET FEATURES:

- Lead-free brass construction
- ½ in. male connections for hot & cold inlets
- Gooseneck faucet with independently operated eyewash
- 2.2 gpm flow rate

COMPLIANCE:

- ANSI/ISEA Z358.1, ASME A112.18.1/CSA B125, NSF 61 and NSF 372

FINISHES:

ADD SUFFIX TO MODEL #

- Polished Chrome (standard)

OPTIONS:

ADD SUFFIX TO MODEL #

- 8 in. gooseneck spout -8
- Vandal resistan 0.5 gpm flow control -BO
- Foot pedal activation (not NSF 372 compliant) -FP
- Laminar flow outlet 1.5 gpm -LF
- Non-aerated eyewash outlets -NA
- Serrated tip with vacuum breaker (not NSF 372 compliant) -ST
- Thermostatic mixing valve for eyewash -TW

WARRANTY:

- 3 year limited


SEE REVERSE FOR ROUGH-IN DIMENSIONS

<p><u>THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.</u></p> <hr/>	<p>SPEAKMAN® 400 ANCHOR MILL ROAD NEW CASTLE, DE 19720 P: 800-537-2107 F: 800-977-2747 WWW.SPEAKMANCOMPANY.COM REVISION DATE: JUNE 2014</p> <div style="text-align: right;">  Management Systems Registered to ISO 9001 525 </div>
---	---

SPEAKMAN®

Eyesaver® Laboratory Faucet with Integrated Eyewash SEF-1000-CA

SPECIFICATION

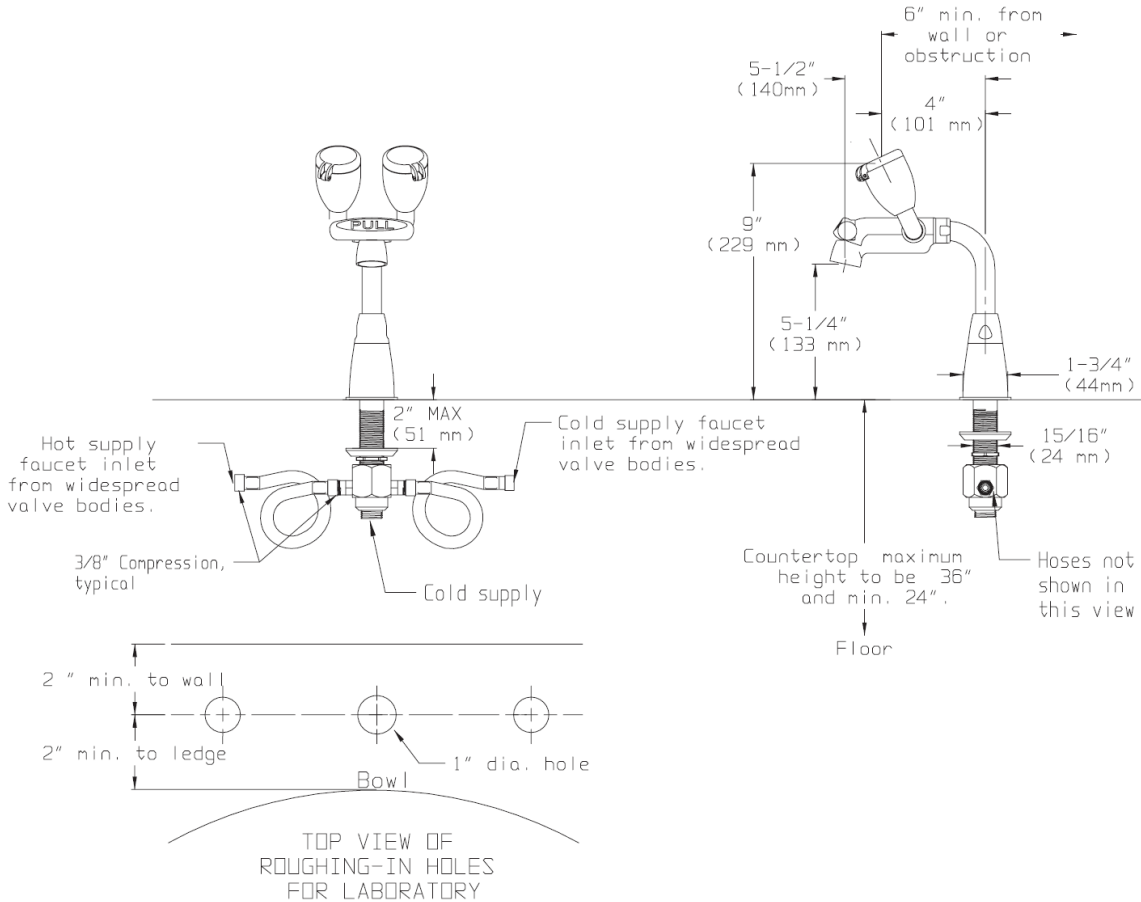

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

526

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720
 P: 800-537-2107 | F: 800-977-2747
 WWW.SPEAKMANCOMPANY.COM



Management Systems
 Registered to ISO 9001

REVISION DATE: JUNE 2014