





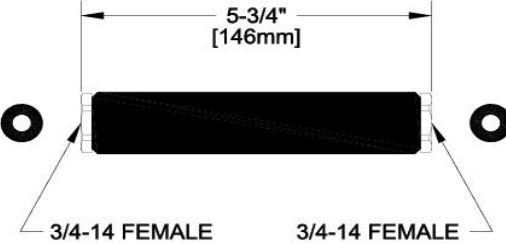

APPLICATION:		PRODUCT NAME: UTILITY SPRAY VALVE		SPEC. 2920 REV. A
JOB NAME:		<input type="checkbox"/> SPECIAL CONFIGURATION <input type="checkbox"/> CHECK BASE MODEL AND OPTIONS		
QUANTITY:	ITEM NO.	MODEL: <input checked="" type="checkbox"/> 2920		
		OPTIONS OR MODIFICATIONS: <input type="checkbox"/> OTHER _____		
		FEATURES SPRAY VALVE * SPRAY NOZZLE THREADED INTO BODY * BRONZE HANDLE - NOT PLASTIC - MEANS FULL "ON" * BLACK DISH GUARD BUMPER * BUILT-IN SPRAY HANDLE CLIP * FITS ALL BRANDS SYSTEM LIMITS * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE: 200 PSI MAX. STATIC SHIPPING WEIGHT * 2.0 LBS		
ANSII/A112.18.1M		 FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com		

SPEC. 2913 REV. A

APPLICATION:		PRODUCT NAME: INSULATED HANDLE 3/4-14 X 3/4-14	
JOB NAME:		<input type="checkbox"/> SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS	
QUANTITY:	ITEM NO.	MODEL: ■ 2913	
		OPTIONS OR MODIFICATIONS: <input type="checkbox"/> OTHER _____	
		FEATURES	
		SHIPPING WEIGHT * 0.5 LBS	
 ANSI/A112.18.1M		 FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com	

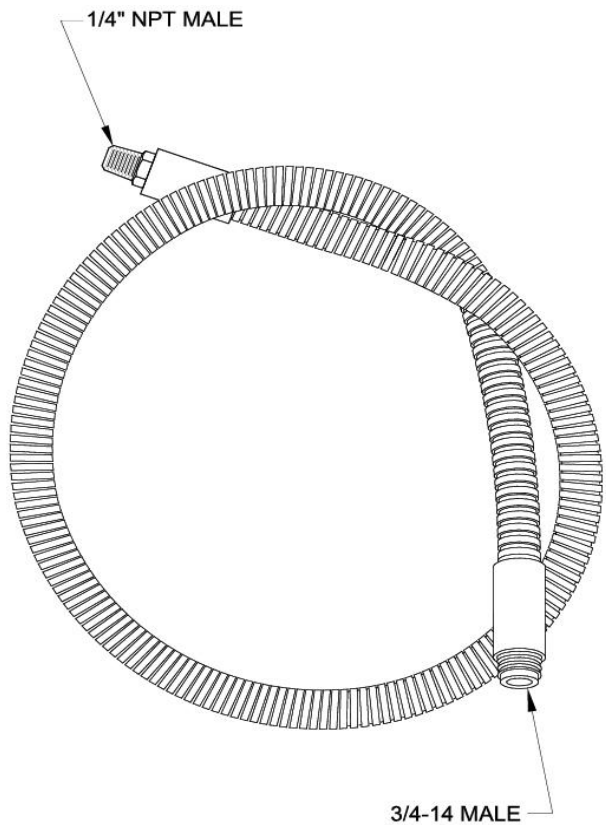APPLICATION:		PRODUCT NAME: HOSE 36" PRE-RINSE	
JOB NAME:		<input type="checkbox"/> SPECIAL CONFIGURATION <input type="checkbox"/> CHECK BASE MODEL AND OPTIONS	
QUANTITY:	ITEM NO.	MODEL: <input checked="" type="checkbox"/> 2914	
		OPTIONS OR MODIFICATIONS: <input type="checkbox"/> OTHER _____	
		FEATURES <ul style="list-style-type: none"> * 36" LENGTH * STAINLESS STEEL END FITTINGS * STAINLESS STEEL EXTERNAL JACKET * 3 PLY FIBER REINFORCED INTERNAL RUBBER HOSE * REPAIRABLE IN FIELD WITH SIMPLE TOOLS 	
		SYSTEM LIMITS <ul style="list-style-type: none"> * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE: 200 PSI MAX. STATIC 	
		SHIPPING WEIGHT <ul style="list-style-type: none"> * 1.25 LBS 	
 ANSI/A112.18.1M		 FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com	

SPEC. 2914